

LED light strip

FOR ROLD12 CEILING

- / Seamless integration with Rold12 ceiling
- / Flexible light design
- / Even light spreading
- / Simple installation

FEATURES


- / 300 diods per meter
- / Installation fixtures included
- / Placement of lights anywhere on the ceiling tile

LED light strip

FOR ROLD12 CEILING

KNAUFDANOLINE

LIGHT FIXTURE SPECIFICS

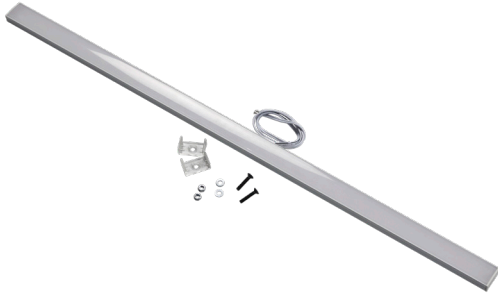

COMPONENTS

LED strip
2 pcs installation clips
2 sets of installation fixtures for clips

LED SPECIFICATIONS



WATT	13 per meter
VOLTAGE	24VDC
KELVIN	2951K
LUMEN	1440 per meter
RA/CRI	>94 Nom.
PROTECTION CLASS	20 IP
LED	300 units per meter
LIGHT SPREADING	120 degrees
DIMMABLE	Yes (dimmer bought separately)
LIFETIME	50,000 hours

FRAME SPECIFICATIONS



COMPONENTS	Anodised aluminium profile 6063-T5 Opal cover PMMA
TYPE	Profile 12 with opal cover
WIDTH	23.5mm
HEIGHT	10mm
LENGTH	595mm
LIFETIME	50,000 hours

POWER SUPPLY



OUTPUT VOLTAGE	24VDC
OUTPUT EFFECT	50W
OUTPUT POWER	2.08A
INPUT VOLTAGE	200-240VAC
INPUT FREQUENCY	50Hz
AMBIANCE TEMP.	-20°C ~ 45°C
WORKING HUMIDITY	45% ~ 85%
PROTECTION CLASS	IP20 / Class II
LIFETIME	30,000 hours
DIMENSIONS, LxWxH	185x63.5x22mm